


# TEMPERATURE SENSOR PROBE SERIES

NTC Sensor -Probe Assembly With Two Probe

Model: GDSN502008

The temperature sensor is composed of two probe, which can be widely used for temperature measurement and control in air conditioners, freezers, wine cabinets, etc.

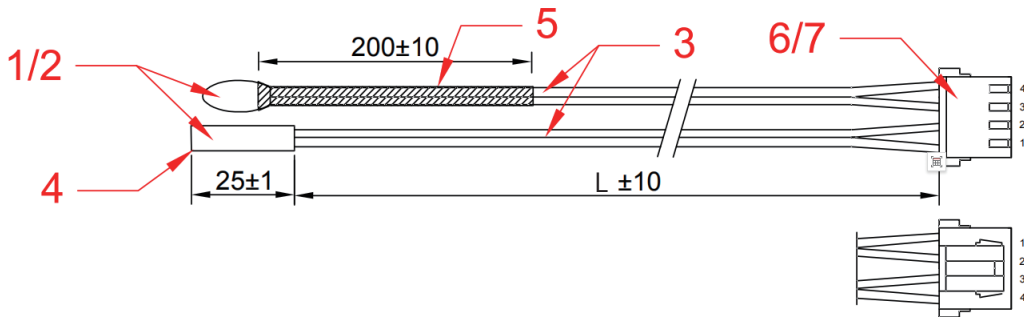

## Product parameters

3.Wire	UL2651 26AWG Black
4.Shell	$\Phi 6 \times 25$ stainless steel/copper shell
5.Sleeve	$\Phi 4.5 \times 200$ Yellow heat shrink sleeve
6.Connector Terminal	JST SXH-001T-P0.6
7.Connector Housing	XHBS XHBSL 4P White

## Electrical Specifications

R(25)	$5K\Omega \pm 2\%$
B(25/50)	$3470K \pm 2\%$
Operating temp.Range( $^{\circ}C$ )	-30 to +105 $^{\circ}C$
Response time in liquid	Max 20s
Insulation test	DC500V $\geq 100M\Omega$ 2s
Voltage withstand test	1500V AC 1mA 1min

Note: All parameters can be customized

## FEATURES

- Good stability and high reliability
- High sensitivity and fast reaction speed
- Wide temperature range from -30  $^{\circ}C$  to +105  $^{\circ}C$
- Wide resistance range: 5K $\Omega$ -500K $\Omega$
- Resistant to corrosive atmospheres and harsh environments
- Convenient installation

DONGGUAN CITU GUANDE SENSOR TECHNOLOGY .,LTD

XiangYuan Road 7#, Shujiu village, ChangPing Town, Dongguan City, Guangdong Province, China

For more details, contact: sales1@chinagoode.com sales\_cai@chinagoode.com

# NTC THERMISTOR SERIES

High accuracy / Stable performance / Quick response

R25=5K $\Omega$ ±2% B25/50=3470K±2%

T(°C)	Rnor(K $\Omega$ )	T(°C)	Rnor(K $\Omega$ )	T(°C)	Rnor(K $\Omega$ )	T(°C)	Rnor(K $\Omega$ )
-30	62.7686	5	11.3485	40	2.8701	75	0.9244
-29	59.4247	6	10.8667	41	2.7703	76	0.8976
-28	56.2809	7	10.4082	42	2.6745	77	0.8716
-27	53.3239	8	9.9716	43	2.5825	78	0.8466
-26	50.5415	9	9.5559	44	2.4942	79	0.8224
-25	47.9223	10	9.1599	45	2.4093	80	0.7989
-24	45.4557	11	8.7825	46	2.3278	81	0.7763
-23	43.132	12	8.4228	47	2.2494	82	0.7544
-22	40.942	13	8.0799	48	2.1741	83	0.7333
-21	38.8771	14	7.7529	49	2.1017	84	0.7128
-20	36.9295	15	7.441	50	2.0321	85	0.693
-19	35.0917	16	7.1434	51	1.9651	86	0.6738
-18	33.3571	17	6.8593	52	1.9006	87	0.6553
-17	31.7191	18	6.5881	53	1.8387	88	0.6373
-16	30.1717	19	6.3292	54	1.779	89	0.6199
-15	28.7095	20	6.0818	55	1.7216	90	0.6031
-14	27.3273	21	5.8455	56	1.6663	91	0.5868
-13	26.0202	22	5.6197	57	1.613	92	0.5711
-12	24.7836	23	5.4038	58	1.5618	93	0.5558
-11	23.6134	24	5.1974	59	1.5124	94	0.541
-10	22.5057	25	5	60	1.4648	95	0.5266
-9	21.4567	26	4.8112	61	1.419	96	0.5128
-8	20.4629	27	4.6305	62	1.3748	97	0.4993
-7	19.5212	28	4.4576	63	1.3322	98	0.4862
-6	18.6285	29	4.2921	64	1.2911	99	0.4736
-5	17.782	30	4.1336	65	1.2515	100	0.4613
-4	16.9791	31	3.9818	66	1.2133	101	0.4495
-3	16.2172	32	3.8364	67	1.1765	102	0.4379
-2	15.494	33	3.6971	68	1.1409	103	0.4268
-1	14.8074	34	3.5636	69	1.1066	104	0.4159
0	14.1552	35	3.4356	70	1.0735	105	0.4054
1	13.5357	36	3.3129	71	1.0416	106	0.3952
2	12.9469	37	3.1952	72	1.0108	107	0.3853
3	12.3871	38	3.0823	73	0.981	108	0.3757
4	11.8548	39	2.974	74	0.9522	109	0.3663

DONGGUAN CITU GUANDE SENSOR TECHNOLOGY ,LTD

XiangYuan Road 7#, Shujiu village, ChangPing Town, Dongguan City, Guangdong Province, China

For more details, contact: sales1@chinagoode.com sales\_cai@chinagoode.com